


Electronic Actuators For Wash Basins

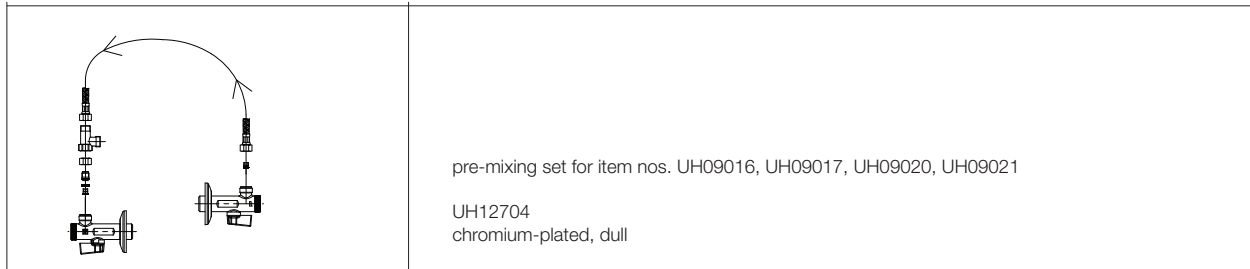

Built-in Material

Housing:	brass acc. to EN 1982, nickel-/chromium-plated
Sealing elements:	EPDM rubber
Connecting pipe:	flexible connecting pipe, G3/8 " x 450
Mounting hole:	Ø 35 mm diameter

Specification

Recommended pressure range:	3 to 5 bar
Maximum pressure:	up to 8 bar
Minimum pressure:	over 0.5 bar
Recommended temperature range	5°C - 65°C
Maximum temperature:	80°C

Use

The sanitary armatures are intended for use in high-pressure systems.

Mounting And Maintenance

Flush all water feeding tubes thoroughly before installation.

Connect the sanitary armature to the water supply outlets by means of flexible tubes. Connect unconditionally to an angle-body valve with a filter. Connect the electronic armature to the electric power supply. Any repairs shall be performed by adequately skilled personnel only.

With operating pressures over 5 bar, a pressure reducing valve shall always be attached to the water supply tube.